




Skim

Eliminator of superficial oils

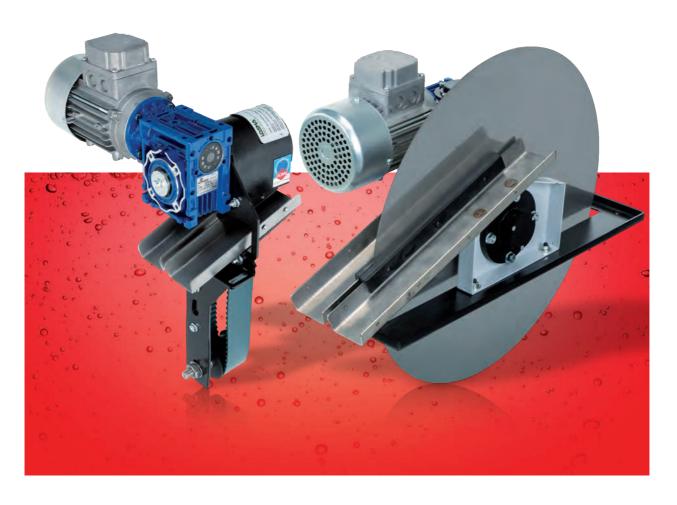

Skim

Technical data Plus

Skim is an eliminator of superficial oil, suitable to be used on every kind of basin or tank, thanks to its shape and building materials.

Skim is available in two versions: disc (Skim D) or belt (Skim N).


This last version is suitable in situations of reduced space and when the tank is not at full capacity.

Skim removes from the coolant surface the veil of light products, which do not mix with water and create a barrier and prevents air from entering into contact with the emulsion allowing the formation of anaerobic flora bacteria.


Thus the use of Skim preserves the quality of coolants and eliminates unpleasant odors.



LOSMA guarantees that every single unit is individually tested through strict control procedures. Each unit is issued a test certificate for quality and function.

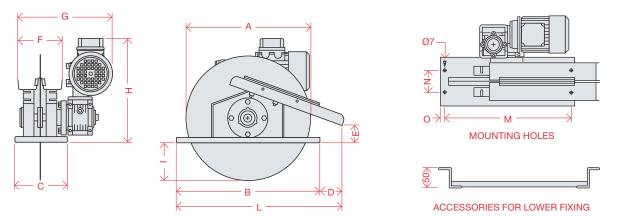


SKIM-D	Dimensions (mm)												Maximum oil suction per hour	Weight	Power (kW) 50 (Hz) / 60 (Hz)	
	Α	В	С	D	Е	F	G	н	1	L	М	N	0	(I/h)	(Kg)	(Kg)
SK.1	350	400	150	60	50	120	280	300	80	462	374	66	13	13	15	0,12
SK.2	500	550	150	52	28	120	280	300	180	612	524	66	13	22	18	0,12
SK.3	600	650	150	78	0	120	280	300	230	740	624	66	13	35	20	0,12

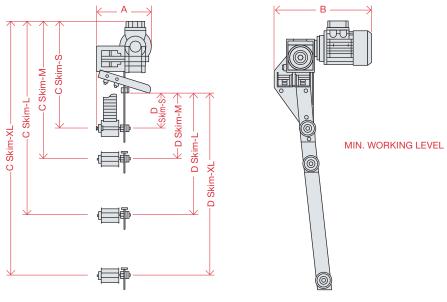

SKIM-N	Di	mensions (mr	n)	Draught D	Weight	Power (kW) 50 (Hz) / 60 (Hz)
	Α	В	С	(mm)	(Kg)	(Kg)
SK-N-S	205	356	441	126	15	0,12
SK-N-M	205	356	554	238	18	0,12
SK-N-L	205	356	982	666	20	0,12
SK-N-XL	205	356	1220	930	23	0,12






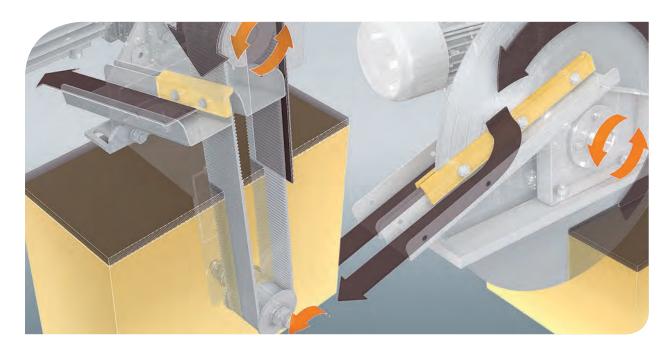

VERSATILITY AND EASY MAINTENANCE

Thanks to the wide range of accessories Skim maintenance to a few simple actions. The wearing can be mounted either on the tank edge, on control of scrapers and the periodical cleaning of the cover, encased or on an internal structure. waste discharging off-lets keeps the system in The extreme simple construction limits the perfect working conditions.

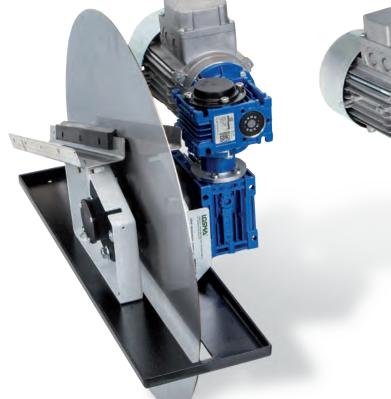

Skim-D









Health


Savings

Efficiency

Environment

Safety

newtarge

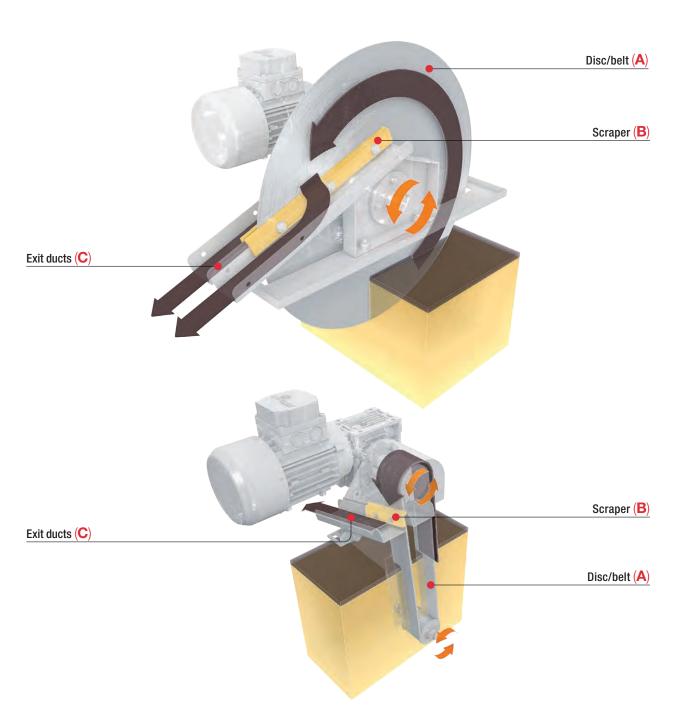

- The disc/belt (A) is immersed into the liquid. Thanks to rotation the polluting agents stick to its surface and are dragged out.
- During rotation the disc/belt meets two scrapers (B) fitted with a rubber rim which remove the film of polluting agents stuck to
- it and transport it outside by means of exit ducts (C).
- 3 Skim can be equipped with an electrical control board with the possibility of setting up a temporized working cycle.



Losma SpA HQ:

Via E. Fermi, 16 - 24035 Curno - Bergamo Tel. +39 035 461444 - Fax +39 035 461671 info@losma.it - www.losma.it

Turin office:

Via G. Brunero, 2 - 10077 San Maurizio Canavese - Torino Tel. +39 011 9275631 info@losma.it - www.losma.it



ISO 9001 TÜV SÜD Certified Company







Autorizzato

Losma GmbH

Albert-Einstein-Str. 2 - 70806 Kornwestheim Tel. +49 7154 8160480 - Fax +49 7154 8160485 info@losma.de - www.losma.de

30

Losma Inc.

30A Wilson Drive - Sparta - NJ 07871 Tel. +973 248 0070 - Fax +973 940 0950 info@losmausa.com - www.losma.com

Losma UK Ltd.

S 6 Strensham Business Park
WR8 9JZ Strensham Worcestershire
Tel. +44 (0)1684 276527 - Fax +44 (0)1684 276470
info@losma.co.uk - www.losma.co.uk

Losma Pvt Ltd.

Plot No 7A, Gat. No. 63, Shindewadi
Tal: Bhor, District: Pune - 412205 - Maharashtra
Tel. +91 9226107775
info@losma.in - www.losma.com